




evtec Wall Mount
Affordable, Green Charging



Product Features

- ⚡ Plug and Charge or Mobile app controlled charging
- ⚡ Wi-Fi / Ethernet connectivity
- ⚡ Built-in over current and 6mA DC leakage protection
- ⚡ Built in Single and Three Phase PEN protection
- ⚡ OCPP 1.6J SON Compliant
- ⚡ Over the air updates
- ⚡ Dynamic Load Management (CT clamps provided)
- ⚡ Available as 7.4kW or 22kW
- ⚡ 48 hour on site engineer support as part of standard warranty
- ⚡ Next Day Delivery on all units

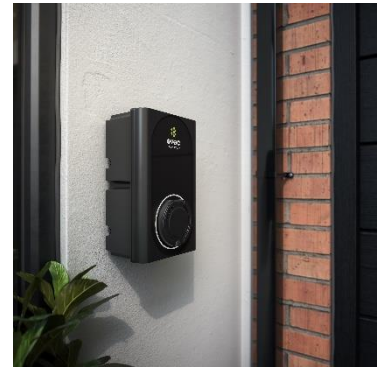

Item	Datasheet	1x7.4KW	1x7.2KW Sockets
Type	Evec Model Number	VEC01	VEC03
		Single 7.4kW	Single 22kW
Input	Power Supply	1P+N+PE	1P+N+PE
	Rated Voltage	AC220~240V	AC220~240V
	Rated current	32A(16A ,13A,10 Adjustable)	32A(16A ,13A,10 Adjustable)
Output	Output Voltage	AC220~240V	AC220~240V
	Maximum Current	32A(16A ,13A,10 Adjustable)	32A(16A ,13A,10 Adjustable)
	Rated Power	2x7.4KW(MAX)	2x22KW(MAX)
User interface	Charger connecter	7.4KW(MAX)	7.4KW(MAX)
	Cable length	Type 2 socket	Cable +plug
	Material	ABS +PC	ABS +PC
	Colour	BLACK	BLACK
	Three colour led	●	●
	OLED	●	●
	Start Mode	●	●
	Plug in and charge	●	●
	OCPP1.6 Ethernet	●	●
	Evec App	●	●
Safety	Ingress Protection	IP54	IP54
	Impact Protection	●	●
	Over current protection	●	●
	Residual current protection AC30mA,DC6mA)	●	●
	PEN protection	●	●
	Surge protection	●	●
	Over/Under voltage protection	●	●
	Over temperature	●	●
	Certification	CE/ UKCA	CE/ UKCA
	certification Standard	EN IEC 61851,EN 62196	EN IEC 61851,EN 62196
Environment	Installation	Wall mounted	Wall mounted
	Mounting options	Floor Posts available	Floor Posts available
	Work Temperature	-25°C~50°C	-25°C~50°C
	Work Humidity	3%~95%	3%~95%
	Work Altitude	<2000m	<2000m
Package	Production Dimension(H*W*D)mm	300*190*105	320*193*105
	Package Dimension(L*W*H)mm	349*239*178	460*365*155
	Net weight (kg)	1.8	5.01
	Gross weight (kg)	2.3	6.01



Item	Datasheet	1x22KW	1x22KW Sockets
Type	Evec Model Number	VEC02	VEC04
Input	Power Supply	3P+N+PE	3P+N+PE
	Rated Voltage	AC400±10%	AC400±10%
	Rated current	32A(16A ,13A,10 Adjustable)	32A(16A ,13A,10 Adjustable)
Output	Output Voltage	AC400±10%	AC400±10%
	Maximum Current	32A(16A ,13A,10 Adjustable)	32A(16A ,13A,10 Adjustable)
	Rated Power	22KW(MAX)	22KW(MAX)
User interface	Charger connecter	AC400±10%	AC400±10%
	Cable length	Type 2 socket	Cable +plug
	Material	ABS +PC	ABS +PC
	Colour	BLACK	BLACK
	Three colour led	●	●
	OLED	●	●
	Start Mode	●	●
	Plug in and charge	●	●
	OCP1.6 Ethernet	●	●
	Evec App	●	●
Safety	Ingress Protection	IP54	IP54
	Impact Protection	●	●
	Over current protection	●	●
	Residual current protection AC30mA,DC6mA)	●	●
	PEN protection	●	●
	Surge protection	●	●
	Over/Under voltage protection	●	●
	Over temperature	●	●
	Certification	CE/ UKCA	CE/ UKCA
	certification Standard	EN IEC 61851,EN 62196	EN IEC 61851,EN 62196
Environment	Installation	Wall mounted	Wall mounted
	Mounting options	Floor Posts available	Floor Posts available
	Work Temperature	'-25°C~50°C	'-25°C~50°C
	Work Humidity	3%~95%	3%~95%
	Work Altitude	<2000m	<2000m
Package	Production Dimension(H*W*D)mm	300*190*105	320*193*105
	Package Dimension(L*W*H)mm	349*239*178	460*365*155
	Net weight (kg)	1.8	5.01
	Gross weight (kg)	2.3	6.01



