


Code: 7G2ASS1GA-QG
Hartland G2 Power Sockets Anthra Gray

Product Image



Wiring

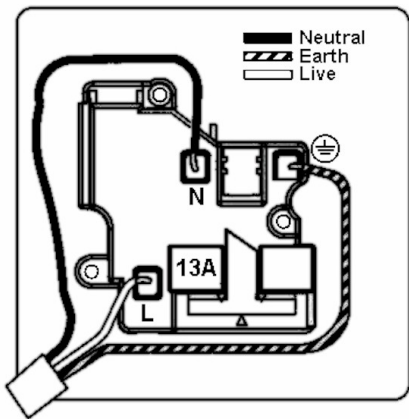

Dimensions

Insert Type	1 gang 13A Double Pole Switched Socket
Insert Colour	Anthra Gray/Quartz Grey
Plate Finish	Anthra Gray
EAN13 Barcode	5051164028909
Commodity Code	85366990
Luckins TSI	433714730
ETIM Class	EC000125
Dimensions(Nominal)	Single: Height = 87.4mm Width = 87.4mm Depth = 4.65mm
Weight	136 GR
Fixing Hole Centres	Box Fixing = 60.3mm
Minimum Wall Box Depth	35mm
Switched Poles	Double
Current Rating	13 Amp
Voltage	220/250V AC
Maximum Load	13 Amp
Mains Frequency	50Hz
IP Rating	IP2XD
Contact Gap Minimum	3mm
Terminal Capacity 1	4x2.5mm ²
Terminal Capacity 2	3x4mm ²
Terminal Capacity 3	2x6mm ² Multi-Strand
Terminal Capacity 4	1x10mm ²
Earth Terminal Capacity 1	4x2.5mm ²
Earth Terminal Capacity 2	3x4mm ²
Earth Terminal Capacity 3	2x6mm ² Multi-Strand
Earth Terminal Capacity 4	1x10mm ²
Product Class 1	Must be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m

DATASHEET

Hamilton®

making connections beautifully

Code: 7G2ASS1GA-QG

Hartland G2 Power Sockets Anthra Gray


Hamilton®
HARTLAND G2
SS1
Switched Socket

Standard/Approval

BS 1363-2

Patents And Trade Marks

Hartland G2 is a Registered Trade Mark No
UK00003388376

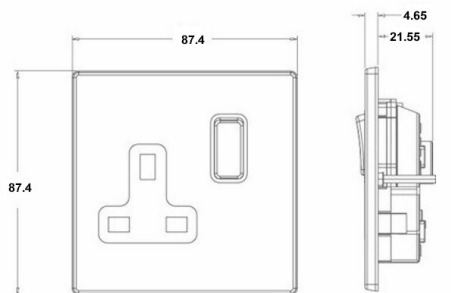

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: info@hamilton-litestat.com | **W:** www.hamilton-litestat.com

(WEB)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 12/08/2026 E&OE