

Code: 7G29SS1USBAB-B


Hartland G2 | HARTLAND G2 RANGE | USB Power Sockets

Product Image



Wiring

Wiring 13Amp Switched Single Sockets with USB Charging Outlet
 — Neutral — Earth — Live

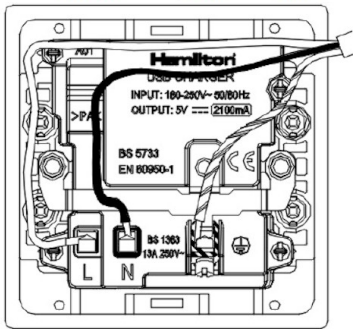


Dimensions

Hamilton®

HARTLAND G2

SS1USBX1

USB Charger + Switched Socket

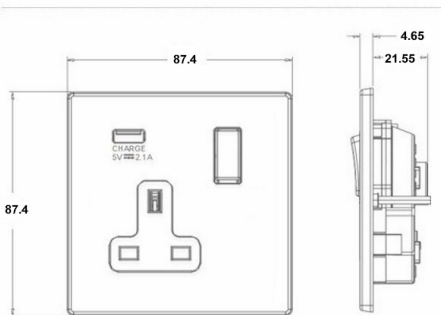

Insert Type

1 gang 13A Single Pole Switched Socket with 1 USB Outlet 1x2.1A

Insert Colour

Antique Brass/Black

EAN13 Barcode

5051164003319

Commodity Code

85363010

Luckins TSI

407517316

Dimensions(Nominal)

Single: Height = 87.4mm Width = 87.4mm Depth = 4.65mm

Fixing Hole Centres

Box Fixing = 60.3mm

Switched Poles

Single

Current Rating

13 Amp, USB 1 x 2.1A

Voltage

180/250V AC, USB = 5V

Maximum Load

13 Amp, USB = 2.1A

Mains Frequency

50/60Hz

IP Rating

IP2XD

Contact Gap Minimum

3mm

Terminal Capacity 1

3x2.5mm²

Terminal Capacity 2

3x4mm²

Terminal Capacity 3

2x6mm² Multi-Strand

Earth Terminal Capacity 1

3x2.5mm²

Earth Terminal Capacity 2

3x4mm²

Earth Terminal Capacity 3

2x6mm² Multi-Strand

Product Class 1

Must be earthed

Ambient Operating Temperature

-15°C to +40°C

Recommended Location

Internal Use Only

Maximum Installation Altitude

2000m

Standard/Approval

BS 1363 BS EN 62368

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,
 4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: info@hamilton-litestat.com | W: www.hamilton-litestat.com

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 5/17/2023 11:24:05 AM E&OE