

# DATASHEET

# Hamilton®

making connections beautifully

Code: 7G2MW45SS1WH-W


## Hartland G2 | HARTLAND G2 RANGE | Double Pole Switches

### Product Image



### Wiring

### Dimensions

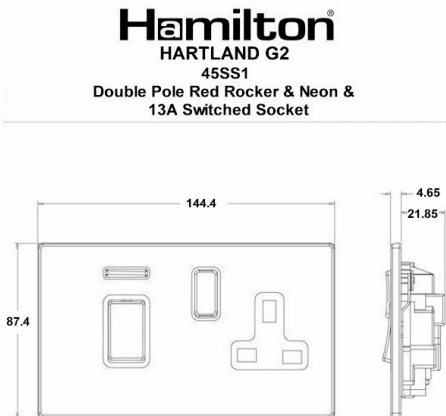

<b>Insert Type</b>	45A Double Pole Red Rocker + Neon + 13A Switched Socket
<b>Insert Colour</b>	Red+White/White
<b>EAN13 Barcode</b>	5051164004828
<b>Commodity Code</b>	85363030
<b>Luckins TSI</b>	407519754
<b>Dimensions(Nominal)</b>	Double: Height = 87.4mm Width = 144.4mm Depth = 4.65mm
<b>Fixing Hole Centres</b>	Box Fixing = 120.6mm
<b>Switched Poles</b>	Double
<b>Current Rating</b>	Switch 45 Amp Socket 13 Amp
<b>Voltage</b>	220/250V AC
<b>Maximum Load</b>	Switch 45 Amp Socket 13
<b>Mains Frequency</b>	50Hz
<b>IP Rating</b>	IP2XD
<b>Contact Gap Minimum</b>	3mm
<b>Terminal Capacity 1</b>	3x6mm <sup>2</sup>
<b>Terminal Capacity 2</b>	2x10mm <sup>2</sup>
<b>Terminal Capacity 3</b>	1x16mm <sup>2</sup>
<b>Earth Terminal Capacity 1</b>	3x6mm <sup>2</sup>
<b>Earth Terminal Capacity 2</b>	2x10mm <sup>2</sup>
<b>Earth Terminal Capacity 3</b>	1x16mm <sup>2</sup>
<b>Product Class 1</b>	Must be earthed
<b>Ambient Operating Temperature</b>	-5° to +40°C
<b>Recommended Location</b>	Internal Use Only
<b>Maximum Installation Altitude</b>	2000m
<b>Standard/Approval</b>	BS 4177

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,  
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: [info@hamilton-litestat.com](mailto:info@hamilton-litestat.com) | W: [www.hamilton-litestat.com](http://www.hamilton-litestat.com)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of of certain finishes. This datasheet was generated on 4/17/2023 2:13:26 PM E&OE