


Code: 7G2MWSHSW

## Hartland G2 | HARTLAND G2 RANGE | Power Sockets

### Product Image



### Wiring

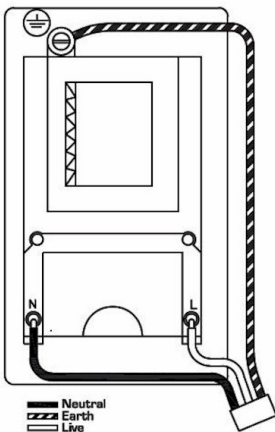


### Dimensions

**Hamilton®**  
HARTLAND G2

SHS

Shaver Dual Voltage Unswitched Socket  
(Vertical Mounted)

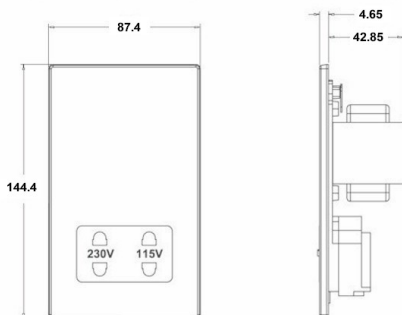

### Insert Type

Shaver Dual Voltage Unswitched Socket (Vertically Mounted)

### Insert Colour

White

### EAN13 Barcode

5051164005078

### Commodity Code

85363010

### Luckins TSI

407517219

### ETIM Class

EC000186

### Dimensions(Nominal)

Double: Height = 144.4mm Width = 87.4mm Depth = 4.65mm

### Weight

653 GR

### Fixing Hole Centres

Box Fixing = 120.6mm

### Minimum Wall Box Depth

47mm

### Switched Poles

None

### Current Rating

20VA

### Voltage

220/250V AC

### Maximum Load

200/250V input; 115/230V 20VA output

### Mains Frequency

50Hz

### IP Rating

IP2XD

### Contact Gap Minimum

None

### Terminal Capacity 1

5 x1mm<sup>2</sup>

### Terminal Capacity 2

4x1.5mm<sup>2</sup>

### Terminal Capacity 3

3x2.5mm<sup>2</sup>

### Terminal Capacity 4

2x4mm<sup>2</sup> Multi-strand

### Terminal Capacity 5

1x6mm<sup>2</sup>

### Earth Terminal Capacity 1

9x1mm<sup>2</sup>

### Earth Terminal Capacity 2

6x1.5mm<sup>2</sup>

### Earth Terminal Capacity 3

4x2.5mm<sup>2</sup>

### Earth Terminal Capacity 4

2x4mm<sup>2</sup> Multi-strand

### Earth Terminal Capacity 5

1x6mm<sup>2</sup>

### Product Class 1

Must be earthed

### Ambient Operating Temperature

-5° to +40°C

### Recommended Location

Internal Use Only

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,  
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: [info@hamilton-litestat.com](mailto:info@hamilton-litestat.com) | W: [www.hamilton-litestat.com](http://www.hamilton-litestat.com)

(WEB)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 13/06/2023 E&OE

**Code:** 7G2MWSHSW

**Hartland G2 | HARTLAND G2 RANGE | Power Sockets**

<b>Maximum Installation Altitude</b>	2000m
<b>Standard/Approval</b>	BS EN 61558-2-5 + BS 4573
<b>Additional Notes</b>	Must be mounted vertically. Shuttered :Yes. Box Depth 47mm
<b>Patents And Trade Marks</b>	Hartland G2 is a Registered Trade Mark No UK00003388376

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,  
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

**T:** +44 (0)1747 860088

**E:** [info@hamilton-litestat.com](mailto:info@hamilton-litestat.com) | **W:** [www.hamilton-litestat.com](http://www.hamilton-litestat.com)

(WEB)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 13/06/2023 E&OE