

# JC130004

## Wall Pack

30W LED Commercial Wall Bulkhead

### Features & Benefits

- IP65 protection
- IK08 rated
- Photocell option available
- Emergency option available



CLASS I



CRI:RA



WARRANTY

### General Information

Product Group

Product Range

Light Source

Light Source Features

Mounting

Product Weight

Color Finish

Overall Dimensions

Recommended Product Location

Method Of Fix

IP Rating

Environment

Suitable For Zones

Origin of manufacturer

Warranty

Driver Manufacturer

LED Manufacturer/Type

Lighting Product Type 1

**LED Bulkhead**

**LED Commercial Wall Bulkhead**

**LED**

**Neutral White**

**Wall mounted**

**2kg**

**Black**

**308 x 288 x 126mm**

**Suitable for interior and exterior**

**Back screw fix**

**IP65**

**Demanding**

**Suitable for inside Zone 1**

**China**

**2 years standard warranty extends to 5 years when registered within the first year of purchase (See Website for terms and conditions)**

**Ding Sheng**

**Derunda Optoelectronics**

**Wall Mount**

## Electrical

Voltage Rating	100-240V~
Secondary Running Current	900mA
Primary Running Current	1.0A
Operating Frequency Hz	50/60Hz
CC or CV	Constant current
Luminaire Circuit Wattage	30W
Sec - Voltage (V)	20-36Vdc
Class	Class I
Total Harmonic Distortion (THD)%	10%
EMC Compliant (EN55015)	Yes
Power Factor Correction	0.95
Input Electrical Connections	Live, neutral, earth
Dimmable	No

## Thermals

Room Ambient Temperature	25°C
Max Driver/Ballast Ambient Temp.	85°C

## Performance Data

Hours life stated is an indication of expected L70 chip and light output calculations when operating in optimum conditions. Product warranty period supports the full product during the term given. The L70 hours expectancy is not correlated with the full product warranty term, nor is it a representation of lumen depreciation during the warranty period.

Actual Lumen Output	2600
Lumens Per Circuit Watt	87
CRI: Ra	72
Correlated Color Temperature	4000
Photometry Available	Yes

## Construction

Primary Material	Aluminium
Outer Diffuser	Polycarbonate
Driver Housing	Polycarbonate


## Packaging

Product Carton Dimensions	30.5 x 13 x 31.5cm
Product Packaged Weight	2.2kg
Quantity Per Outer Carton	4
Outer carton(L)- cm	54.5cm
Outer carton(W)- cm	33cm

Outer carton(H)- cm	<b>33.5cm</b>
Outer carton overall dimensions	<b>54.5 x 33 x 33.5cm</b>
Outer carton Net weight- kg	<b>8.82kg</b>
Outer carton Gross weight- kg	<b>9.56kg</b>
Product Bar Code EAN-13 Number	<b>5052544106057</b>
Outer carton Bar Code ITF-14 Number	<b>15052544106054</b>

## Standards & Approvals

Manufactured In Accordance To	<b>BS EN 60598-2-1</b>
CE Marked	<b>Yes</b>
Date code/Purchase order No.	<b>Yes</b>
WEEE Symbol	<b>Yes</b>
Certificate Of Conformity	<b>Available on request</b>
Accredited Members	<b>LIA, ISO9001:2015, ISO14001:2015</b>

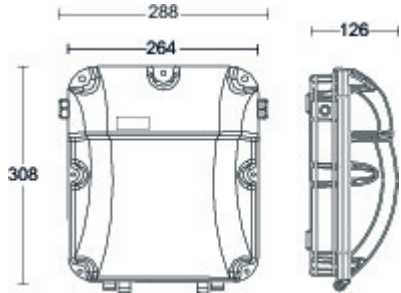


---

JCC Lighting LTD Innovation Centre, Beeding Close, Southern Cross Trading Estate, Bognor Regis, West Sussex PO22 9TS  
 Sales: 01243 838999 (8am to 5pm Monday to Friday) Fax: 01243 838998 | [sales@jcc.co.uk](mailto:sales@jcc.co.uk) | [www.jcc.co.uk](http://www.jcc.co.uk)  
 Company Registration Number: 03044848 | VAT Number: 918544112