

JC077111BLK/EXT


Line Of Light Emergency

Line of Light Extend 1200mm Dir/Indir UGR 16/18/20/22W IP20 3/4/57K BLK EM



Features & Benefits

- Two-part construction allowing easy access to termination and internal components
- Available in 4ft and 5ft lengths
- Available in white, silver and black
- Colour selectable between 3000K, 4000K & 5700K
- Illuminated corners & upward illumination options
- Suspension kit available
- Linking kit (JC077156) available to assemble longer lengths, squares and rectangle configurations
- Sections and corners can be connected via a simple plug and play system
- For longer seamless runs add /EXT to any standard Line of Light product codes to order middle/end pieces that exclude end caps and flex

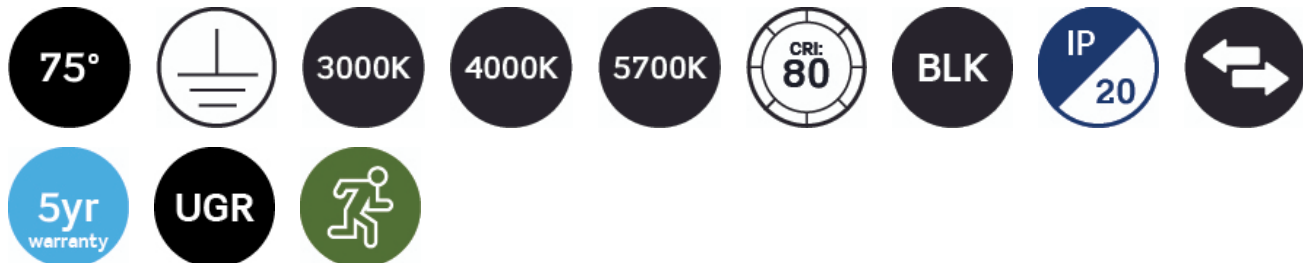

General Information

Mounting	Surface or Suspended
Suitable For Zones	Outside Zone 2
Product Group	Commercial Linear
Color Finish	Black
Product Shape	Rectangular
Product Range	Line Of Light
Overall Dimensions	1205 x 60 x 78
Length (mm)	1205
Width (mm)	60
Height (mm)	78
Product Weight(kg)	2.3
Light Source	LED
Light Source Features	3CCT Selectable
Luminaire Accessories	JC077156 linking kit, JC077150 Corner(add BLK/SIL/WH), JC077153 2m suspension kit(add BLK/SIL/WH), JC077154

Fixing centres	5m suspension kit(add BLK/SIL/WH)
IP Rating	See instruction hseet
Origin of manufacturer	20
Warranty	China
Operation Type	5 Year Warranty inc batteries(Terms & conditions apply)
Driver manufacturer	On/off
LED manufacturer/type	BOKE
	Shaanxi/2835

Electrical

Voltage Rating	220-240
Primary Running Current(Amp)	0.135
Inrush current(Amps)	4.025A peak ,153us duration(50 % Ipeak)
Operating Frequency Hz	50/60Hz
Secondary running current(mA)	400/450/500/550
Constant Current or Constant Voltage	CC
Luminaire Circuit Wattage1	16
Luminaire Circuit Wattage2	18
Luminaire Circuit Wattage3	20
Luminaire Circuit Wattage4	22
Class	I
Output Voltage Max/Range (VDC)	24-42
Total Harmonic Distortion (THD)%	8
EMC Compliant (EN55015)	Yes
Power Factor Correction	0.98
Input Electrical Connections	Live, Earth, Neutral
Dimmable	No

Emergency Data

Load Voltage(DC)	20-50
LOR % in Emergency Mode	13/11/10/9
Minimum Battery run time	3 hours
Recharge Time	24 hours
Inverter PFC	0.5

Battery Data

Battery Specification	3.2V 3300mAh
Battery Type	LifePO4
Nominal battery current	3.3A
Charge Current	0-250mA
Recharge Time	24 hours
Deep Discharge Protection	Yes

Thermals

Thermal Cut Out	yes
Performance Data	
LED Life (Hours)*	50000
Energy Rating	This product contains a light source of energy efficiency class E
Actual Lumen Output1	1600
Actual Lumen Output2	1850
Actual Lumen Output3	2000
Actual Lumen Output4	2200
Lumens Per Circuit Watt1	103
Lumens Per Circuit Watt2	106
Lumens Per Circuit Watt3	108
Lumens Per Circuit Watt4	107
Color Rendering Index	80-89
CRI: Ra	80
Correlated Colour Temperature1	3000
Correlated Colour Temperature2	4000
Correlated Colour Temperature3	5700
Beam Angle °	70
LOR (Light Output Ratio) %	100
Photometry Available	Yes

Construction



Primary Material	Aluminium
Outer Diffuser	Polycarbonate
Driver Housing	Polycarbonate

Packaging

Product Bar Code EAN-13 Number	5052544129254
--------------------------------	---------------

Standards & Approvals

Manufactured in accordance to	BS EN 60598-2-1,2-22
CE Marked	Yes
UKCA Marked	Yes
Date code/Purchase order No.	Yes
WEEE symbol	Yes
Certificate Of Conformity	Available on request
Accredited Members	LIA, ISO9001-2015, ISO14001-2015



*Hours life stated is an indication of expected L70 chip and light output calculations when operating in optimum conditions. Product warranty period supports the full product during the term given. The L70 hours expectancy is not correlated with the full product warranty term, nor is it a representation of lumen depreciation during the warranty period.

JCC Lighting LTD, Lux Park, Chichester Business Park, City Fields Way, Tangmere, Chichester, West Sussex, PO20 2FT.
Sales: 01243 838999 (8am to 5pm Monday to Friday) Fax: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk
Company Registration Number: 03044848 | VAT Number: 918544112