

JC1102/WH

X50

X50 Fire rated Tilt downlight 3W/5W IP65 3000/4000/5700K 400/650 lms
White

Features & Benefits

- Two wattage and three colour selectable from remote driver
- Two-part first fix connector with dedicated testing terminals
- Double hinged terminal for easy access to terminal blocks
- Tested for use in Solid, I-Joist and Steel Open Web joist ceilings
- 20° tiltable adjustment
- Triac dimmable as standard, see JCC.co.uk for approved dimmer list



General Information

Mounting	Recessed
Environment	Demanding
Suitable For Zones	Zone 1
Product Group	Fire-rated Downlights
Color Finish	White
Product Shape	Round
Product Range	X50
Overall Dimensions	100Ø x 58.4 x 547 cm (sse profile drawing for details)
Length (mm)	547
Height (mm)	58.4
Diameter (mm)	100
Product Weight(kg)	0.390
Light Source	LED
Light Source Features	3CCT Switchable

Additional Information	For Emergency version, use JC131003 only. Not suitable for use with JCEM002/JCEM002ST
Recommended product location	Indoor use only
Minimum Void Requirement	50mm
Method of fix	Spring clips
Distance from lighted object	0.3m
Product Aperture Size	83mm Ø
Max Angle Of Tilt & Rotation	20° Tilt only
IP Rating	IP65
Duration of Fire protection (Mins)	Tested for use in fire-rated ceilings. Full information and upto-date fire testing certificates for ceiling system types are available on JCC.CO.UK
Origin of manufacturer	China
Warranty	5 Year Warranty(Terms & conditions apply)
Dimming Protocol Compatibility	Triac dimmable
Driver manufacturer	JCC
Lighting Product Type 1	Downlight
Lighting Product Type 2	Fire-rated

Electrical

Voltage Rating	230-240
Primary Running Current(Amp)	0.0018/0.0026
Operating Frequency Hz	50/60
Secondary running current(mA)	0.0083/0.0127
Constant Current or Constant Voltage	CC
Luminaire Circuit Wattage	3/5 selectable
Class	II
Output Voltage Max/Range (VDC)	33
EMC Compliant (EN55015)	Yes
Input Electrical Connections	Live, Earth, Neutral
Dimmable	Yes, Triac dimmable only

Thermals

Thermal Cut Out	Yes
Insulation Coverage	Loosely Cover with Mineral Wool Insulation
Minimum Void Requirement	50mm
Operating Temperature Range °C	0 to 26

Performance Data

Energy Rating	This product contains a light source of energy efficiency class A
Actual Lumen Output	480/700
Lumens Per Circuit Watt	137/140
Color Rendering Index	80-89
CRI: Ra	80

Correlated Color Temperature

3000/4000/5700K

Beam Angle °

60°

LOR (Light Output Ratio) %

100

Photometry Available

Yes

Construction

Driver Housing

Polycarbonate

Packaging

Product Bar Code EAN-13 Number

5052544121654

Standards & Approvals

Manufactured in accordance to

BS EN 60598:2015, 2-1, 2-2

CE Marked

Yes

UKCA Marked

Yes

Date code/Purchase order No.

Yes

WEEE symbol



Yes

Certificate Of Conformity

available on request

Accredited Members

LIA, ISO9001-2015, ISO14001-2015

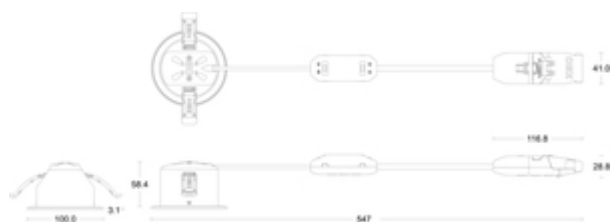

JCC Lighting LTD, Lux Park, Chichester Business Park, City Fields Way, Tangmere, Chichester, West Sussex, PO20 2FT.
Sales: 01243 838999 (8am to 5pm Monday to Friday) Fax: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk
Company Registration Number: 03044848 | VAT Number: 918544112

This document is uncontrolled if printed, all information is subject to change

Version 38 [08/10/2024]