




Power a clean future.

NexBlue Edge (UK)

Product Sheet

Product Sheet

NexBlue Edge (UK)

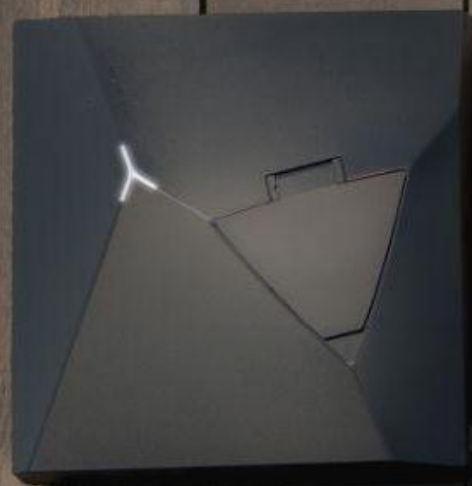

Sweden Office:

+46 738981965
Birger Jarlsgatan 57 C,
113 56 Stockholm, Sweden

UK Office:

+44 (0) 7834225339
71-75, Shelton Street, Covent Garden
London, WC2H 9JQ, UK

General Inquiry Email:

info@nexblue.com

NexBlue Edge (UK)

EV Charger for Commercial Scenarios

One for All and Future-oriented

- ✓ Adaptive to 1.4-22 kW charging power
- ✓ All grid systems compatible: TN-C-S, TN-C, TN-S, and TT
- ✓ OTA updates with WiFi / 4G eSIM / BLE
- ✓ Local OCPP 1.6-J supported

Easy Installation and Configuration

- ✓ 4-minute installation
- ✓ Back plate design enables easy installation, maintenance and scalability
- ✓ NexBlue APP & Portal provide convenient configurations

Cost Saving


- ✓ OZEV-approved for both commercial and residential grants
- ✓ Dynamic load balancing (with NexBlue Zen)
- ✓ Solar surplus charging (with NexBlue Zen)
- ✓ Low-cost charging with energy tariffs
- ✓ Schedule charging during off-peak hours

Safety and Reliability

- ✓ CE certified by leading testing agencies: SGS & TUV
- ✓ 22 smart sensors ensure protection and safety
- ✓ PEN-fault protection integrated (1/3 phase)
- ✓ Anti tamper protection



Dimensions

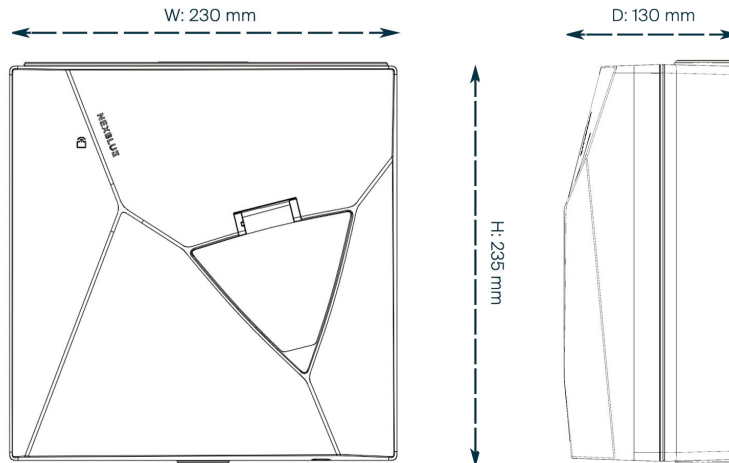

Technical information

General

Dimension (mm):

H: 235 x W: 230 x D: 130

Wall Mounting (mm):

H: 206 x W: 130

Weight: 1.9 kg

Operating Temperature:

-30 °C to +50 °C

Storage Temperature:

-40 °C to +70 °C

Working Humidity: 5% to 80%

Working Altitude: < 2000 m

External Package: Carton

Warranty: 3 years

User Interface

Enclosure: Plastics

LED Indicator:

Red / Green / Blue / White / Orange

RFID Reader:

ISO / IEC 14443 Type A

Start Mode:

myNexBlue APP / RFID / NFC / Plug & Play / NexBlue User Portal

Connectivity

Wi-Fi: 2.4 GHz 802.11b/g/n

Built-in eSIM:

4G (LTE Cat M1) / 2G / GPRS

Nexus RF

Bluetooth: BLE 4.2

OCPP: Local OCPP 1.6-J

Protection

Built-in Residual Current Protection:

RDC-DD (6 mA DC) according to IEC 62955 + 30 mA AC*

PEN Fault protection: Integrated protection according to BS 7671:2018/A2:2022

Ingress Protection: IP54

Impact Protection: IK08

UV Resistant

Insulation Class: I

Overvoltage Category: III

EMC Level: CLASS B

Other Protection:

Overload protection
Residual current protection
Over/under voltage protection
Temperature protection
Relay welding protection
PE presence detection
CP diode presence detection

Charging & Power grids

Charging Power: 1.4 to 22 kW

Charge Connector: Type 2 Socket

Rated Current:

6 A 1 phase to 32 A 3 phase

Maximum Output Current: 32 A

Voltage:

3 * 400 V AC / 230 V AC (±10%)

Installation Network:

TN-C-S, TN-C, TN-S, and TT

Mains Frequency: 50 Hz

Built-in Energy Meter: ±2%

Regulations:

EU Type Examination Certificate



(Module B) Confirming Compliant with:
2014/53/EU (RED) | 2014/35/EU (LVD)
2014/30/EU (EMC) | 2011/65/EU (RoHS)
The Electric Vehicles (Smart Charge Points) Regulations 2021
See DoC for details at

<https://nexblue.com/pages/doc-declaration-of-conformity>

* External type A RCD is required.

Build a Smart Charging Experience

Software Design for Users

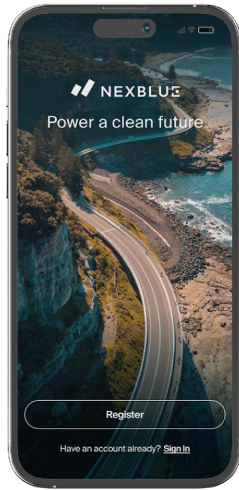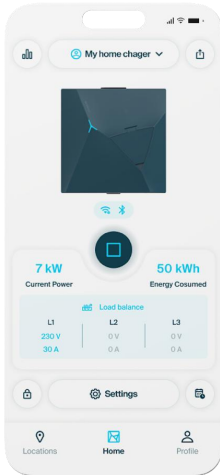


myNexBlue APP enables users to:

- ✓ Monitor and control your charging smartly
- ✓ Seamless Local Control via Bluetooth
- ✓ Schedule your charging in the most affordable and cleanest way
- ✓ Track your charging statistics and history
- ✓ Integrated with external service providers via local OCPP or our proprietary APIs
- ✓ Share your chargers' access with your family and friends
- ✓ Multiple charging on/off options: Plug&Play, RFID, mobile NFC, and APP control
- ✓ Online diagnosis and OTA upgrades



Build a Smooth Installation Experience

Software Design for Installers and Organizations

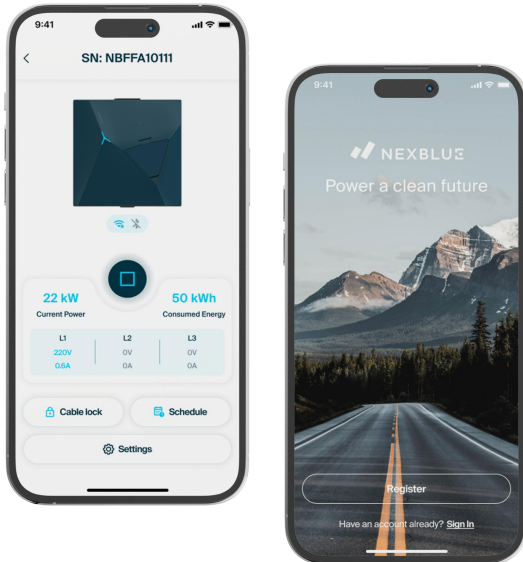

NexBlue Partner APP enables installers to:

- ✓ Create new installation locations or manage existing ones
- ✓ Configure new chargers
- ✓ Conduct post-configuration testing for the chargers
- ✓ Facilitate the transfer of locations to new owners
- ✓ Monitor real-time status for maintenance purposes
- ✓ Change operators as the owners' preferences

NexBlue Partner Portal enables installers and organizations to:

- ✓ Oversee and monitor installation locations
- ✓ View and export charging consumption data by user, charger or RFID card
- ✓ Manage all installations within a NexBlue Registered Organization
- ✓ Provide real-time status monitoring and reconfiguration for installed chargers
- ✓ Facilitate pre-configurations prior to installations






NEXBLUE


Website:
www.nexblue.com

For Technical Specification, please visit:
<https://nexblue.com/pages/product-sheet>

Follow us:



Facebook Group
[@NexBlueOfficial](https://www.facebook.com/NexBlueOfficial)



Instagram
[@nexblue.official](https://www.instagram.com/nexblue.official)