Centrif® Duo

Centrifugal Kitchen & Utility Room Fans

Features & Benefits

- 100mm circular spigot for speedy installation
- Humidity sensing model for automatic operation
- Suitable for both kitchen and utility rooms
- Removable grille assembly for easy cleaning
- Speed set at installation
- Meets current Building Regulations Approved Document F
- Timer model for internal rooms
- Surface mounted
- Includes washable grease filter

Kitchen and Utility Ventilation

The Centrif Duo range is a series of 100mm centrifugal extract fans for the domestic environment. The range is designed to provide extraction levels **that comply with Building Regulation requirements,** with special humidity sensing variants for local authority use.

Motor

The motor features greased-for-life ball bearings which allow the fan to be installed at any angle. Insulation is Class E. Double insulated appliance. Supply voltage 220-240V/1/50Hz.

Fast installation

The Centrif Duo has a 100mm circular spigot. The Flush mounting kit enables the spigot to be converted to a side outlet. The spigot also encloses a built-in, spring operated back draught shutter. The Centrif Duo Range can be wall mounted using a telescopic wall fitting kit available as an accessory (requires a 115mm diameter hole).

Humidistat control

Humidistat is selectable for either kitchen or utility speed separate to any other control to reduce nuisance noise. Boost operation by pullcord or switch live.

Models

Centrif Duo P
(Pullcord)
Two speed kitchen extract fan with pullcord. Choice of two speeds for boost, set at installation.
Stock Ref
256120

Centrif Duo T
(Timer)
Two speed with adjustable timer between 5-30 minutes. Choice of two speeds for boost, set at installation.
Stock Ref
256220

Centrif Duo DP
(Two Speed)
Two speed and Off with pullcord or remote switch. Switches between Off, low and one of the 2 boost speeds.
Stock Ref
256320

Centrif Duo HTP
(Humidity)
Intermittent on 1 of 2 speeds (Utility or Kitchen selectable at installation). Operation by integral humidity sensor or pullcord. Separate speeds selectable for humidistat and pullcord. Optional continuous trickle speed available at installation.
Stock Ref
256420

Dimensions (mm)

A	B	C	D	E	FØ
231	261	137	79	58	98

Weight 1.75kg

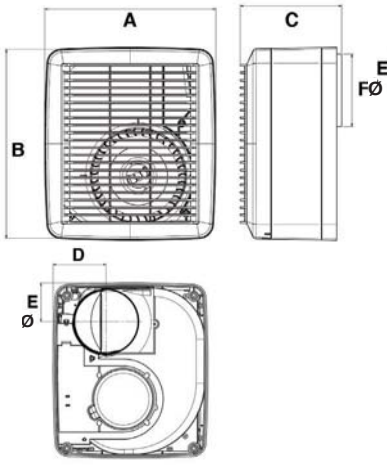

Wall Kit
Stock Ref
254102 (White)
254100 (Brown)

Decoration Frame Assembley
Stock Ref
442551

Performance

Performance @ 0 pa

	High speed		Med speed		Low speed		Power (W)			Sound dB(A) @ 3m		
Model	m³/h	l/s	m³/h	l/s	m³/h	l/s	Kitchen	Utility	Trickle	Kitchen	Utility	Trickle
Centrif Duo P/T	220	61	130	36	-	-	60	41	N/A	51.8	38	N/A
Centrif Duo DP/HTP	220	61	130	36	90	25	60	41	9	51.8	38	21.5