

Lo-Carbon Silhouette® 125

Bathroom/Toilet Fans

Vent-Axia®
Lo-Carbon Residential Fans



Features & Benefits

- Models Basic/Timer/Humidity - Installation options
- Low power consumption - Lower running costs
- Quiet running
- Fully opening and closing shutters - Improved insulation
- 1 of 2 speeds selectable at installation
- Non transparent shutters - Enhanced privacy
- Ball bearing motors for vertical or horizontal application
- Unique humidity sensor track - Improved response
- 5 Year Motor Guarantee
- IPX4 rated
- Suitable for wall, ceiling and panel mounting

Lo-Carbon Silhouette 125HT (Timer/Humidistat)

125mm bathroom/toilet fan with integral adjustable auto humidity sensor from 60-90% RH and overrun timer, indicator light which operates on manual override only, and back draught shutter. Datalogger as standard on all Lo-Carbon humidity controlled Silhouette fans.

Model	Stock Ref	£Trade
125HT	446485	212.30

Wall Kit


Stock Ref	£Trade
455226	23.03



18mm actual profile

Dimensions (mm)

Panel

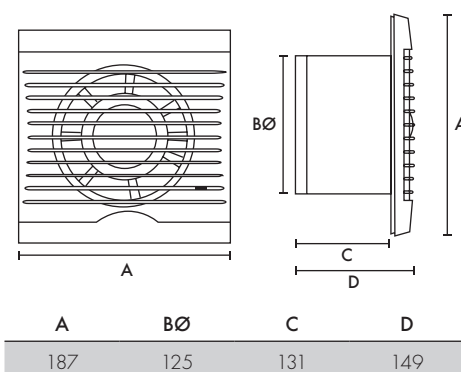

Slimline Bathroom Ventilation

With a slim profile of only 18mm, Lo-Carbon Silhouette blends in with the wall surface to provide an unobtrusive installation. Lo-Carbon Silhouette has a FID performance up to 149m³/h. It can be ceiling/panel mounted and connected to an appropriate duct run to the outside.

Models

Lo-Carbon Silhouette 125B

125mm bathroom/toilet fan with indicator light and back draught shutter.


Model	Stock Ref	£Trade
125B	446483	112.16

Lo-Carbon Silhouette 125T (Timer)

125mm bathroom/toilet fan with integral adjustable electronic overrun timer (5-30 minutes), indicator light which operates on manual override only, and back draught shutter.

Model	Stock Ref	£Trade
125T	446484	126.55

Performance Curve

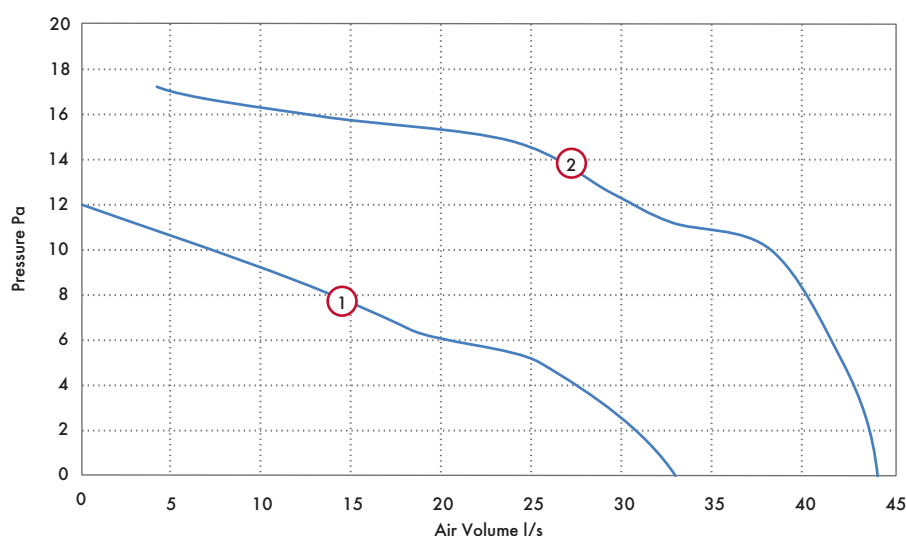

Performance Guide

Model	Curve Ref	Extract Performance			Sound dB(A)		SFP (W/l/s)
		m³/h	l/s	Watts	@ 3m	@ 0Pa	
Lo-Carbon Silhouette 125B/T/HT	Low	120	33	4.5	33	0.14	
Lo-Carbon Silhouette 125B/T/HT	High	160	44	8	37	0.18	