

VA140/150

Axial Kitchen Fans



Features & Benefits

- VA140/150 Panel models
- 2 Year Guarantee
- Thermo electric shutters to prevent back drafts
- Meets current Building Regulations Approved Document F
- IP44 rated
- Suitable for wall, ceiling, panel and window mounting

Kitchen ventilation

VA140/150 Panel models are designed to alleviate the everyday problems that condensation and household odours may cause. Effectively extracts odours and moisture laden air from kitchens giving a healthy and fresh environment.

Building Regulations

Specifically sized to meet the current Building Regulation requirements for powered extract ventilation in domestic kitchens. Control facility fitted as standard. The VA140/150 range is fitted with internal louvres conforming to the latest international safety standards.

Please contact our Customer Service Department for exposed site application.

Models

VA140/150KP

Single speed kitchen extract fan with On/Off pullcord.

Stock Ref
140120

VA140/150KT (Timer)

Single speed kitchen extract fan with adjustable overrun timer (3-30 minutes).

Stock Ref
140220

VA140/150KHP (Humidistat)

Single speed humidity-controlled kitchen extract fan with full speed pullcord override. Humidity adjustment 62-82%RH.

Stock Ref
140320

VA140/150KHT (Timer/Humidistat)

Humidity controlled kitchen extract fan with adjustable overrun timer (3-30 minutes). Humidity adjustment 62-82% RH.

Stock Ref
140420

VA140/150VS

Variable speed kitchen extract with a built in adjustable speed controller, which can reduce the speed to 40% of its maximum performance.


Stock Ref
458915

Dimensions (mm)

A	B	C	DØ	E	F	G	H	I
216	224	80	146	60	220	37	55	104


Weight 1.75kg

Panel

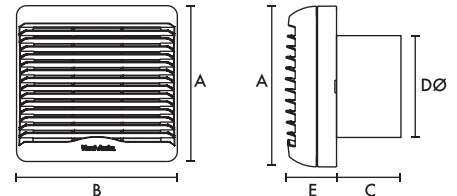

Panel fixing hole Ø 152mm

Wall




Wall fixing hole Ø 152mm

Wall Kit

Stock Ref:
140902 (White)
140903 (Brown)

Window

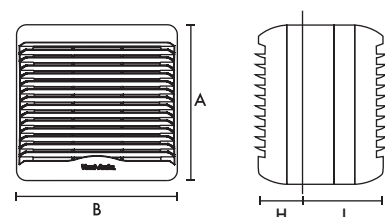

Window fixing hole Ø 160mm

Window Kit

Stock Ref
140901

Performance

Model	Shutter Actuator	Extract Performance FID				Watts	Sound dB(A) @ 3m
		m³/h	l/s				
VA140/150KP	Pullcord	245	68	18.8	36		
VA140/150KT/KHP/KHT	Instant	245	68	18.8	36		
VA140/150VS	Pullcord	100 low 245 boost	28 low 68 boost	18.8	36		

VA150®

Window Mount Axial Kitchen Fans



Features & Benefits

- Complete with window kit
- 2 Year Guarantee
- Meets current Building Regulations Approved Document F
- IP44 rated

Kitchen ventilation

VA150 Window models are designed to alleviate the everyday problems that condensation and household odours may cause. Effectively extracts odours and moisture laden air from kitchens giving a healthy and fresh environment.

Shutter

The louvre shutter on the VA150 is concealed behind the interior grille. Operates automatically when the fan is switched On. Natural trickle vent facility (unpowered) available on all models.

Building Regulations

The VA150 Range is specifically sized to **meet the current Building Regulation requirements** for powered extract ventilation in domestic kitchens. The VA150 range is fitted with internal and external louvres conforming to the latest international safety standards.

Performance

Model	Shutter		Extract Performance - FID			Sound dB(A)
	Attenuator		m ³ /h	l/s	Watts	@ 3m
VA150P/A	Pullcord/Instant		220	60	19	37

Motor

Maintenance free, sealed for life ball bearings in the purpose made electric motor, economical and quiet running. Double insulated appliance. Supply voltage 220-240V/1/50Hz.

Models

VA150P

Specifically designed for domestic use in kitchens and utility rooms, the VA150P is a single speed 150mm (6") extract ventilation unit for windows. Fan and shutter operated by integral pullcord. (window kit supplied) Colour: white.

Stock Ref

152110

VA150A

A single speed 150mm (6") extract fan with instant opening/closing shutter operated by remote switch. Suitable for installation in bathroom or kitchen. (Window kit supplied) Colour: white.



Stock Ref

153110

Dimensions (mm)

A	B	C	D
216	224	130	55

Weight 2.5kg



Window fixing hole Ø 184mm