



|                      |                                                                               |
|----------------------|-------------------------------------------------------------------------------|
| <b>Category</b>      | Emergency                                                                     |
| <b>Application</b>   | Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail |
| <b>Specification</b> | Performance                                                                   |

# Watchman

Watchman Exit Box

**Code:** AWAT/1



## PRODUCT FEATURES

- Slim white steel LED exit box with legend
- Larger dimensions enables easy retrofit replacement of fluorescent products
- LiFePO4 Lithium battery provides improved energy consumption, product reliability and lifetime

### GENERAL INFORMATION

|                                         |            |
|-----------------------------------------|------------|
| <b>Wattage</b>                          | 3.5W       |
| <b>CRI</b>                              | 70         |
| <b>CCT</b>                              | 6500K      |
| <b>Input</b>                            | 220-240V   |
| <b>Operating Temp</b>                   | 0°C - 40°C |
| <b>SDCM</b>                             | 6          |
| <b>Product Weight without Packaging</b> | 0.977 kg   |

### TECHNICAL INFORMATION

|                                       |             |
|---------------------------------------|-------------|
| <b>Light Source</b>                   | LED         |
| <b>Colour / Finish</b>                | White       |
| <b>IP Rating</b>                      | IP20        |
| <b>IK Rating</b>                      | IK10        |
| <b>Class Protection</b>               | 1           |
| <b>Internal / External</b>            | Internal    |
| <b>Surface / Recessed / Suspended</b> | Wall        |
| <b>Lumen Depreciation</b>             | L70 50,000h |
| <b>Warranty (Years)</b>               | 5           |
| <b>CE Mark</b>                        | Yes         |
| <b>Height</b>                         | 60 mm       |
| <b>Emergency Output Duration</b>      | 3 Hr        |





|                      |                                                                               |
|----------------------|-------------------------------------------------------------------------------|
| <b>Category</b>      | Emergency                                                                     |
| <b>Application</b>   | Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail |
| <b>Specification</b> | Performance                                                                   |

# Watchman

Watchman Exit Box

**Code:** AWAT/1

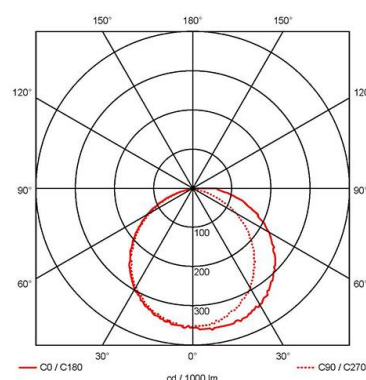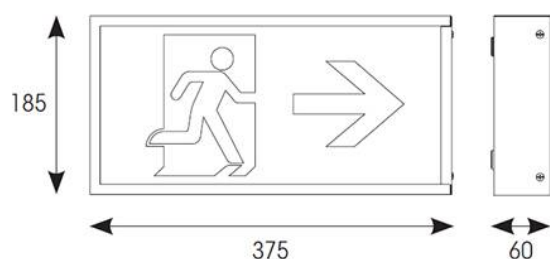

## ACCESSORIES

|            |                                          |
|------------|------------------------------------------|
| ASBP/32/LI | 3.2V 1500mAh LiFePO4 Replacement Battery |
| AG8/L/AU   | Watchman Legend Arrow Up                 |
| AG8/L/AD   | Watchman Legend Arrow Down               |
| AG8/L/AL   | Watchman Legend Arrow Left               |
| AG8/L/AR   | Watchman Legend Arrow Right              |

## MANDATORY ACCESSORIES

|          |                             |
|----------|-----------------------------|
| AG8/L/AU | Watchman Legend Arrow Up    |
| AG8/L/AD | Watchman Legend Arrow Down  |
| AG8/L/AL | Watchman Legend Arrow Left  |
| AG8/L/AR | Watchman Legend Arrow Right |

## SPARES

|            |                                          |
|------------|------------------------------------------|
| ASBP/32/LI | 3.2V 1500mAh LiFePO4 Replacement Battery |
|------------|------------------------------------------|

