


## 73SS1BC-B

### Hartland | HARTLAND RANGE | Power Sockets


Item Image



Wiring

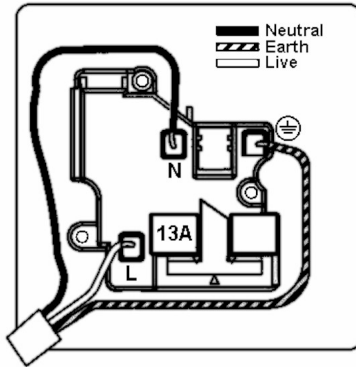

Dimensions

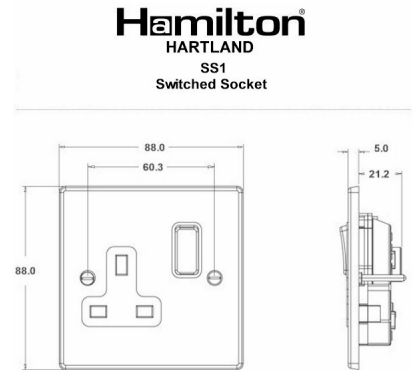

|                               |  |
|-------------------------------|--|
| Primary Range                 | Hartland   |
| Insert Type                   | 1 gang 13A Double Pole Switched Socket               |
| Insert Colour                 | Bright Chrome/Black                                  |
| EAN13 Barcode                 | 5017503236015  |
| Commodity Code                | 85363010   |
| Luckins TSI                   | 385552309  |
| Dimensions(Nominal)           | Single: Height = 88.0mm Width = 88.0mm Depth = 5.0mm |
| Weight                        | 121 GR   |
| Switched Poles                | Double   |
| Current Rating                | 13 Amp   |
| Voltage                       | 220/250V AC  |
| Maximum Load                  | 13 Amp   |
| Mains Frequency               | 50Hz   |
| IP Rating                     | IP2XD  |
| Contact Gap Minimum           | 3mm  |
| Terminal Capacity 1           | 4x2.5mm <sup>2</sup>                                 |
| Terminal Capacity 2           | 3x4mm <sup>2</sup>                                   |
| Terminal Capacity 3           | 2x6mm <sup>2</sup> Multi-Strand                      |
| Terminal Capacity 4           | 1x10mm <sup>2</sup>                                  |
| Earth Terminal Capacity 1     | 4x2.5mm <sup>2</sup>                                 |
| Earth Terminal Capacity 2     | 3x4mm <sup>2</sup>                                   |
| Earth Terminal Capacity 3     | 2x6mm <sup>2</sup> Multi-Strand                      |
| Earth Terminal Capacity 4     | 1x10mm <sup>2</sup>                                  |
| Product Class 1               | Must be earthed                                      |
| Ambient Operating Temperature | -5° to +40°C   |
| Recommended Location          | Internal Use Only                                    |
| Maximum Installation Altitude | 2000m  |
| Standard/Approval             | BS 1363-2  |
| Additional Notes              | Dual Earth: Yes                                      |

## 73SS1BC-B

### Hartland | HARTLAND RANGE | Power Sockets

|   |  |  |
|---|--|--|
| <p>All products listed conform to current British or European standard and the product information is correct at the time of going to press.</p>  | <p>All accessories are manufactured under an accredited BS EN ISO 9001 : 2015 Quality Management System.</p>         | <p>It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice.</p> |
| <p>Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding.</p>   | <p>Due to manufacturing processes we cannot guarantee an exact colour match and shadings of of certain finishes.</p> | <p>Correct as at 18 August 2021 08:00 AM E&amp;OE</p>  |
| <p>R Hamilton &amp; Co Ltd, Unit 10 Carrick Business Centre, 4-5 Bonville Road, Brislington, Bristol, BS4 5NZ<br/> T: +44 (0)1747 860088 F: +44 (0)1179 710414<br/> E: info@hamilton-litestat.com www.hamilton-litestat.com<br/> Registered Office 1 Rushmills, Bedford Road, Northampton NN4 7YB<br/> Registered in London No. 941624 VAT Registration No. 222 6607 84</p> |  |   |
| <p>73SS1BC-B - Hartland Bright Steel 1 gang 13A Double Pole Switched Socket Bright Chrome/Black</p>   |  |  |