


Code: 73SHSB

Hartland | HARTLAND RANGE | Power Sockets

Product Image




Wiring

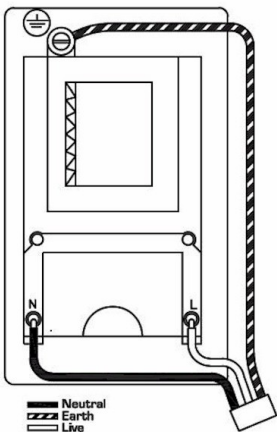

Dimensions

Hamilton[®]
HARTLAND
SHS

Shaver Dual Voltage Unswitched Socket
(Vertical Mounted)

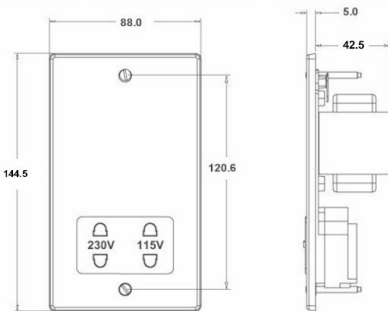

Insert Type

Shaver Dual Voltage Unswitched Socket (Vertically Mounted)

Insert Colour	Black
EAN13 Barcode	5017503231034
Commodity Code	85363010
Luckins TSI	385552163
Dimensions(Nominal)	Double: Height = 144.5mm Width = 88.0mm Depth = 5.0mm
Weight	766 GR
Fixing Hole Centres	Box Fixing = 120.6mm Grid Fixing = N/A
Switched Poles	None
Current Rating	20VA
Voltage	220/250V AC
Maximum Load	200/250V input; 115/230V 20VA output
Mains Frequency	50Hz
IP Rating	IP2XD
Contact Gap Minimum	None
Terminal Capacity 1	5 x1mm ²
Terminal Capacity 2	4x1.5mm ²
Terminal Capacity 3	3x2.5mm ²
Terminal Capacity 4	2x4mm ² Multi-strand
Terminal Capacity 5	1x6mm ²
Earth Terminal Capacity 1	9x1mm ²
Earth Terminal Capacity 2	6x1.5mm ²
Earth Terminal Capacity 3	4x2.5mm ²
Earth Terminal Capacity 4	2x4mm ² Multi-strand
Earth Terminal Capacity 5	1x6mm ²
Product Class 1	Must be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS EN 61558-2-5 + BS 4573

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: info@hamilton-litestat.com | W: www.hamilton-litestat.com

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 5/15/2023 2:53:04 PM E&OE

Code: 73SHSB

Hartland | HARTLAND RANGE | Power Sockets

Additional Notes

Must be mounted vertically. Shuttered :Yes. Box Depth 47mm

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: info@hamilton-litestat.com | **W:** www.hamilton-litestat.com

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of of certain finishes. This datasheet was generated on 5/15/2023 2:53:04 PM E&OE