


Code: 7G27SS2USBCBC-W
Hartland G2 USB Power Sockets Bright Chrome

Product Image



Wiring

Wiring 13Amp Switched Double Sockets with
Twin USB Charging Outlets

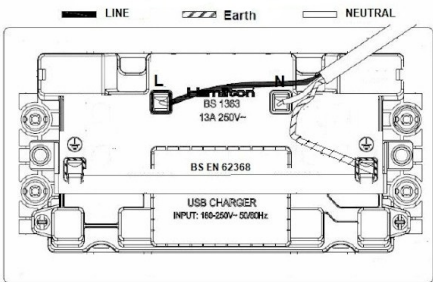

Dimensions

Insert Type	2 gang 13A Double Pole Switched Socket with USB Outlets Types A+C 2x2.4A
Insert Colour	Bright Chrome/White
Plate Finish	Bright Chrome
EAN13 Barcode	5051164001063
Commodity Code	85366990
Luckins TSI	407518988
ETIM Class	EC000125
Dimensions(Nominal)	Double: Height = 87.4mm Width = 144.4mm Depth = 4.65mm
Weight	271 GR
Fixing Hole Centres	Box Fixing = 120.6mm
Minimum Wall Box Depth	35mm
Switched Poles	Double
Current Rating	13 Amp, 1 x 2.4A Type A + 1 x 2.4A Type C
Voltage	180/250V AC USB TYPE A & C =5V
Maximum Load	13 Amp, USB TYPE A & C = 2.4A
Mains Frequency	50/60Hz
IP Rating	IP2XD
Contact Gap Minimum	3mm
Terminal Capacity 1	3x2.5mm ²
Terminal Capacity 2	3x4mm ²
Terminal Capacity 3	2x6mm ² Multi-Strand
Earth Terminal Capacity 1	3x2.5mm ²
Earth Terminal Capacity 2	3x4mm ²
Earth Terminal Capacity 3	2x6mm ² Multi-Strand
Product Class 1	Must be earthed
Ambient Operating Temperature	-15°C to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS1363 BS EN 62368

DATASHEET

Hamilton®

making connections beautifully

Code: 7G27SS2USBCBC-W

Hartland G2 USB Power Sockets Bright Chrome


Hamilton®

**HARTLAND G2
SS2USBC**

2 gang 13A Double Pole Switched Socket with
1 USB Outlet + 1 USB Type C Outlet 2x2.4A (4.8A Total)

Patents And Trade Marks

Hartland G2 is a Registered Trade Mark No
UK00003388376

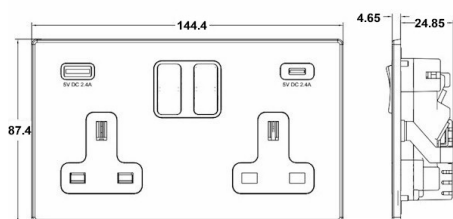

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: info@hamilton-litestat.com | **W:** www.hamilton-litestat.com

(WEB)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 12/08/2026 E&OE