DATASHEET

Hamilton®
making connections beautifully

Code: 7G2MWSS2USBULTWH-W

Hartland G2 | HARTLAND G2 RANGE | USB Power Sockets

Product Image

Wiring

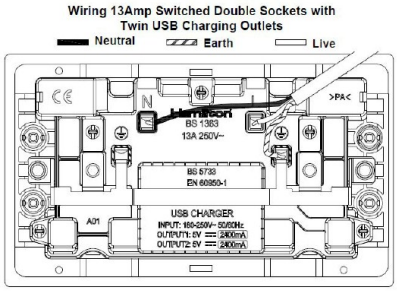

Dimensions

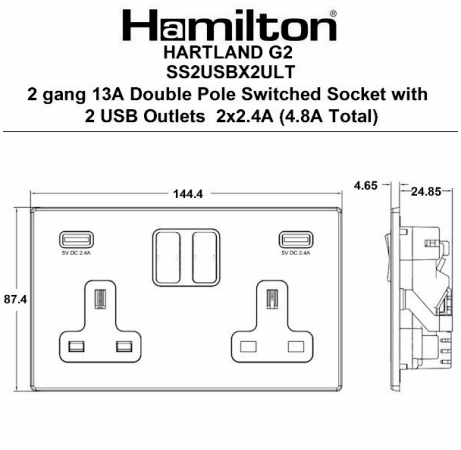

Insert Type	2 gang 13A Double Pole Switched Socket with 2 USB Outlets 2x2.4A (4.8A Total)
Insert Colour	White/White
EAN13 Barcode	5051164005146
Commodity Code	85363010
Luckins TSI	407517905
Dimensions(Nominal)	Double: Height = 87.4mm Width = 144.4mm Depth = 4.65mm
Weight	297 GR
Fixing Hole Centres	Box Fixing = 120.6mm
Switched Poles	Double
Current Rating	13 Amp, USB 2 x 2.4A
Voltage	180/250V AC USB = 5V
Maximum Load	13 Amp, USB = 2.4A X 2
Mains Frequency	50/60Hz
IP Rating	IP2XD
Contact Gap Minimum	3mm
Terminal Capacity 1	3x2.5mm²
Terminal Capacity 2	3x4mm²
Terminal Capacity 3	2x6mm² Multi-Strand
Earth Terminal Capacity 1	3x2.5mm²
Earth Terminal Capacity 2	3x4mm²
Earth Terminal Capacity 3	2x6mm² Multi-Strand
Product Class 1	Must be earthed
Ambient Operating Temperature	-15°C to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS1363 BS EN 62368

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ
T: +44 (0)1747 860088
E: info@hamilton-litestat.com | **W:** www.hamilton-litestat.com

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of of certain finishes.
This datasheet was generated on 4/17/2023 2:13:02 PM E&OE