

JC077061BLK/EXT


Line Of Light Emergency

Line of Light Extend 1500mm Direct/Indirect 16/18/20/22W IP20 3/4/57K Black EM



Features & Benefits

- Two-part construction allowing easy access to termination and internal components
- Available in 4ft and 5ft lengths
- Available in white, silver and black
- Colour selectable between 3000K, 4000K & 5700K
- Illuminated corners & upward illumination options
- Suspension kit available
- Linking kit (JC077156) available to assemble longer lengths, squares and rectangle configurations
- Sections and corners can be connected via a simple plug and play system
- For longer seamless runs add /EXT to any standard Line of Light product codes to order middle/end pieces that exclude end caps and flex

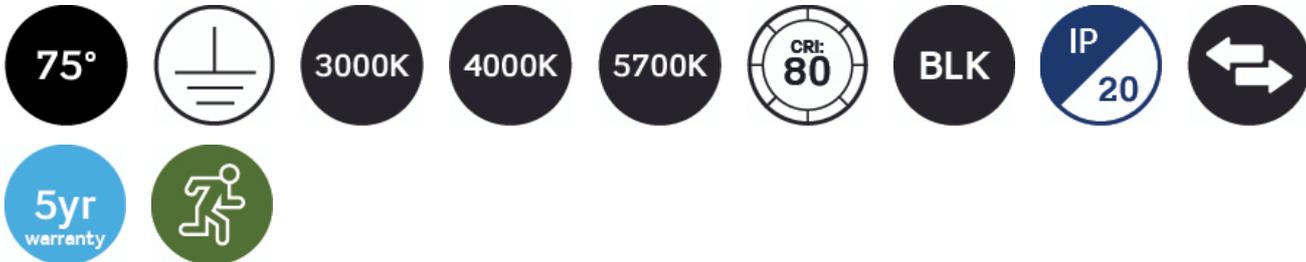

General Information

Mounting	Surface or Suspended
Suitable For Zones	Outside Zone 2
Product Group	Commercial Linear
Color Finish	Black
Product Shape	Rectangular
Product Range	Line Of Light
Overall Dimensions	1505 x 60 x 78
Length (mm)	1505
Width (mm)	60
Height (mm)	78
Product Weight(kg)	2.7
Light Source	LED
Light Source Features	3CCT Selectable
Luminaire Accessories	JC077156 linking kit, JC077150 Corner(add BLK/SIL/WH), JC077153 2m suspension kit(add BLK/SIL/WH), JC077154

Fixing centres
IP Rating
Origin of manufacturer
Warranty
Operation Type
Driver manufacturer
LED manufacturer/type

5m suspension kit(add BLK/SIL/WH)
See instruction hseet
20
China
5 Year Warranty inc batteries(Terms & conditions apply)
On/off
BOKE
Shaanxi/2835

Electrical

Voltage Rating **220-240**
Primary Running Current(Amp) **0.135**
Inrush current(Amps) **4.025A peak ,153us duration(50 % Ipeak)**
Operating Frequency Hz **50/60Hz**
Secondary running current(mA) **400/450/500/550**
Constant Current or Constant Voltage **CC**
Luminaire Circuit Wattage1 **16**
Luminaire Circuit Wattage2 **18**
Luminaire Circuit Wattage3 **20**
Luminaire Circuit Wattage4 **22**
Class **I**
Output Voltage Max/Range (VDC) **24-42**
Total Harmonic Distortion (THD)% **8**
EMC Compliant (EN55015) **Yes**
Power Factor Correction **0.98**
Input Electrical Connections **Live, Earth, Neutral**
Dimmable **No**

Emergency Data

Load Voltage(DC) **20-50**
LOR % in Emergency Mode **13/11/10/9**
Minimum Battery run time **3 hours**
Recharge Time **24 hours**
Inverter PFC **0.5**

Battery Data

Battery Specification **3.2V 3300mAh**
Battery Type **LifePO4**
Nominal battery current **3.3A**
Charge Current **0-250mA**
Recharge Time **24 hours**
Deep Discharge Protection **Yes**

Thermals

Thermal Cut Out **yes**

Performance Data

LED Life (Hours)* **50000**

Energy Rating **This product contains a light source of energy efficiency class E**

Actual Lumen Output1 **1800**

Actual Lumen Output2 **2050**

Actual Lumen Output3 **2250**

Actual Lumen Output4 **2450**

Lumens Per Circuit Watt1 **113**

Lumens Per Circuit Watt2 **114**

Lumens Per Circuit Watt3 **113**

Lumens Per Circuit Watt4 **111**

Color Rendering Index **80-89**

CRI: Ra **80**

Correlated Colour Temperature1 **3000**

Correlated Colour Temperature2 **4000**

Correlated Colour Temperature3 **5700**

Beam Angle ° **75**

LOR (Light Output Ratio) % **100**

Photometry Available **Yes**

Construction

Primary Material **Aluminium**

Outer Diffuser **Polycarbonate**

Driver Housing **Polycarbonate**

Packaging

Product Bar Code EAN-13 Number **5052544128875**

Standards & Approvals

Manufactured in accordance to **BS EN 60598-2-1,2-22**

CE Marked **Yes**



UKCA Marked **Yes**

Date code/Purchase order No. **Yes**

WEEE symbol **Yes**

Certificate Of Conformity **Available on request**

Accredited Members **LIA, ISO9001-2015, ISO14001-2015**

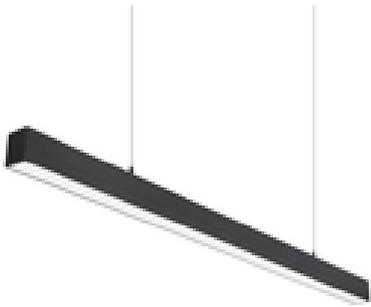

*Hours life stated is an indication of expected L70 chip and light output calculations when operating in optimum conditions. Product warranty period supports the full product during the term given. The L70 hours expectancy is not correlated with the full product warranty term, nor is it a representation of lumen depreciation during the warranty period.

JCC Lighting LTD, Lux Park, Chichester Business Park, City Fields Way, Tangmere, Chichester, West Sussex, PO20 2FT.
Sales: 01243 838999 (8am to 5pm Monday to Friday) Fax: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk
Company Registration Number: 03044848 | VAT Number: 918544112

This document is uncontrolled if printed, all information is subject to change

Version 98 [05/02/2026]